



For installation of Harrier inground uplight round dia 7.87" and square 7.87" LED
Model. UHA-60295, UHA-60296, UHA-60305 and UHA-60306.


Product drawing (dimensions)

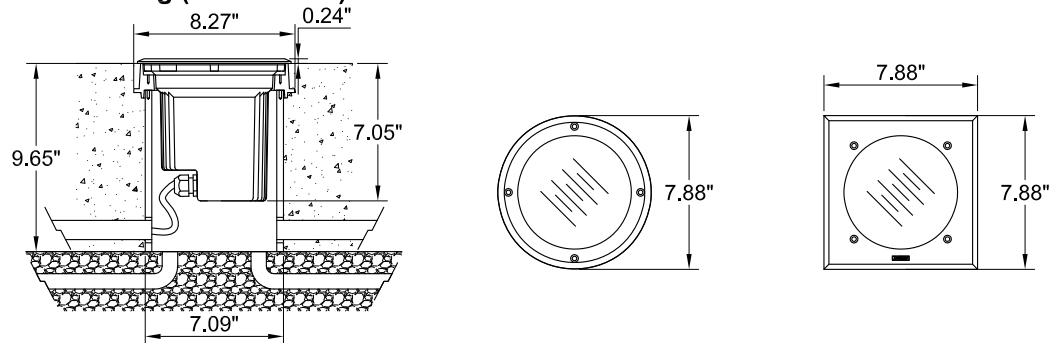


OK
YES




NO




NO




①




②




③

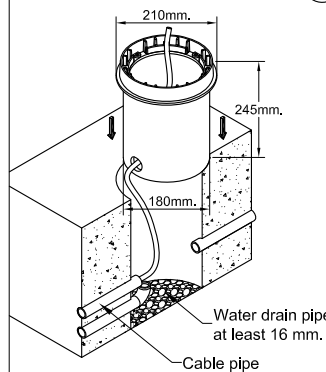

④

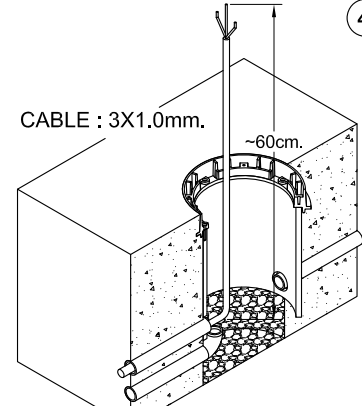


⑤




Torque :3.0Nm.

⑥




Torque :3.0Nm.

⑦



⑧

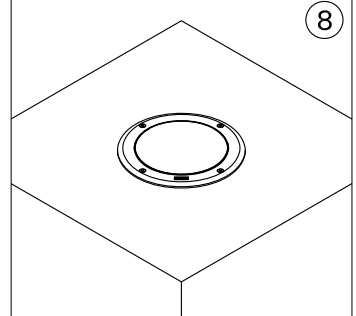

Notice to installer :

- 1.WIRING INSTRUCTIONS** Warning : RISK OF FIRE AND ELECTRICAL SHOCK. : FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY>FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL CODE SPECIFICATIONS. DISCONNECT POWER BEFORE SERVICING.
- 2.This fixture has a VOLTAGE SPECIFIC BALLAST,**Check that the supply voltage is the same as the installed ballast voltage.

Ligman Lighting USA

7144 NE Progress Court, Hillsboro
Oregon, 97124, USA
Tel : 503 645 0500 | Fax : 503 645 8100

www.ligmanlightingusa.com

UHA-60295 29/03/24 / REV_1
1/1

FM-TS-13-1/13-05-2563/Rev.6